

Product Summary



$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
20V	170mΩ@4.5V	0.75A
	230mΩ@2.5V	
	350mΩ@1.8V	

Feature


- Trench Technology Power MOSFET
- Low $R_{DS(on)}$
- Low Gate Charge
- ESD Protected

Application

- Load Switching
- Low Current Inverters
- Low Current DC/DC Converters

MARKING:

SOT-23


1. GATE
2. SOURCE
3. DRAIN

Schematic diagram

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain - Source Voltage		V_{DS}	20	V
Gate - Source Voltage		V_{GS}	±12	V
Continuous Drain Current ^{1,5}	$T_A = 25^\circ\text{C}$	I_D	0.75	A
Pulsed Drain Current ²		I_{DM}	3	A
Power Dissipation ^{4,5}	$T_A = 25^\circ\text{C}$	P_D	0.2	W
Thermal Resistance from Junction to Ambient ⁵		$R_{\theta JA}$	625	$^\circ\text{C/W}$
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	20			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 20V, V_{GS} = 0V$			1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 10V, V_{DS} = 0V$			± 10	μA
On Characteristics ³						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	0.35	0.6	0.7	V
Drain-source On-resistance	$R_{DS(on)}$	$V_{GS} = 4.5V, I_D = 0.65A$		170	380	m Ω
		$V_{GS} = 2.5V, I_D = 0.55A$		230	450	
		$V_{GS} = 1.8V, I_D = 0.45A$		350	800	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 10V, V_{GS} = 0V, f = 1MHz$		56		pF
Output Capacitance	C_{oss}			15		
Reverse Transfer Capacitance	C_{rss}			10		
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = 10V, V_{GS} = 4.5V, I_D = 0.65A$		0.8		nC
Gate-source Charge	Q_{gs}			0.2		
Gate-drain Charge	Q_{gd}			0.1		
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = 10V, V_{GS} = 4.5V,$ $R_L = 25\Omega, R_G = 3\Omega$		6.7		ns
Turn-on Rise Time	t_r			4.8		
Turn-off Delay Time	$t_{d(off)}$			17.3		
Turn-off Fall Time	t_f			7.4		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_S = 0.15A$			1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$. Pulse width is $10\mu s$, duty cycle is 1%
- 5.Device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

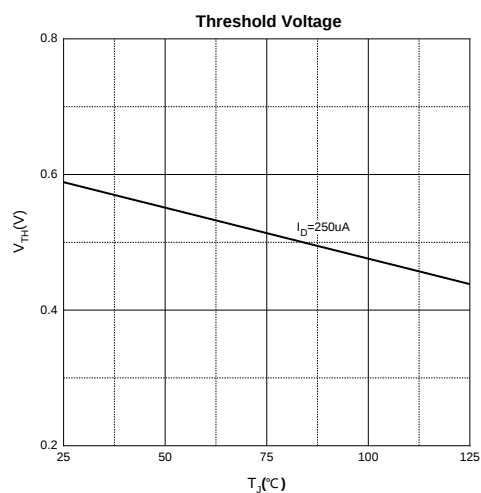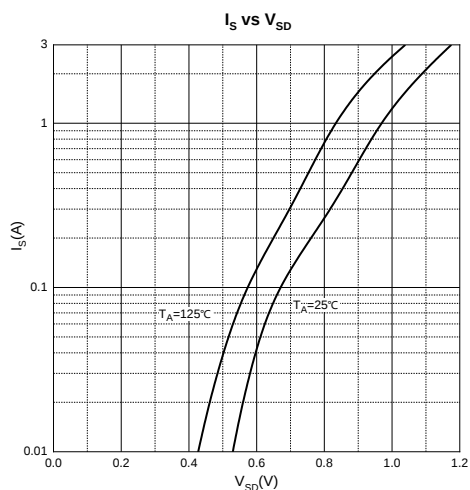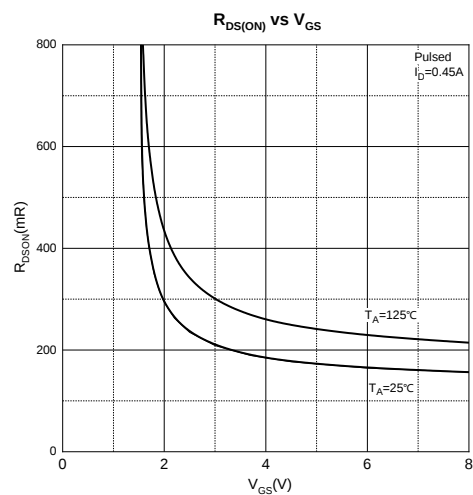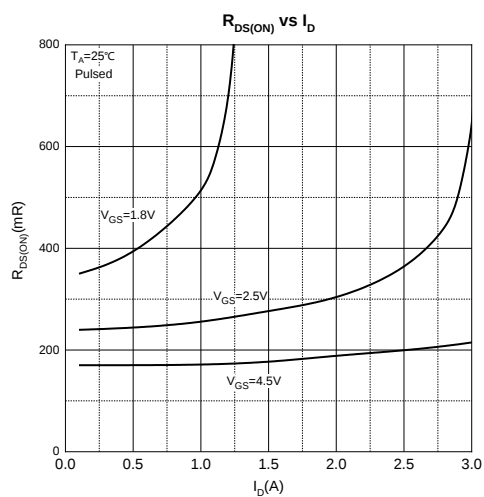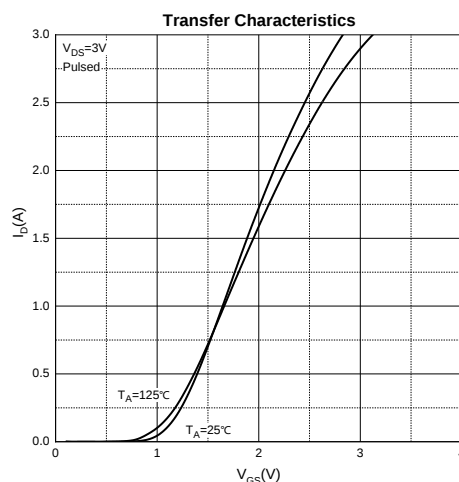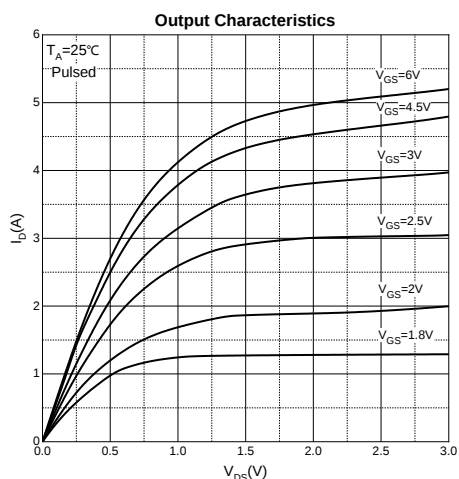

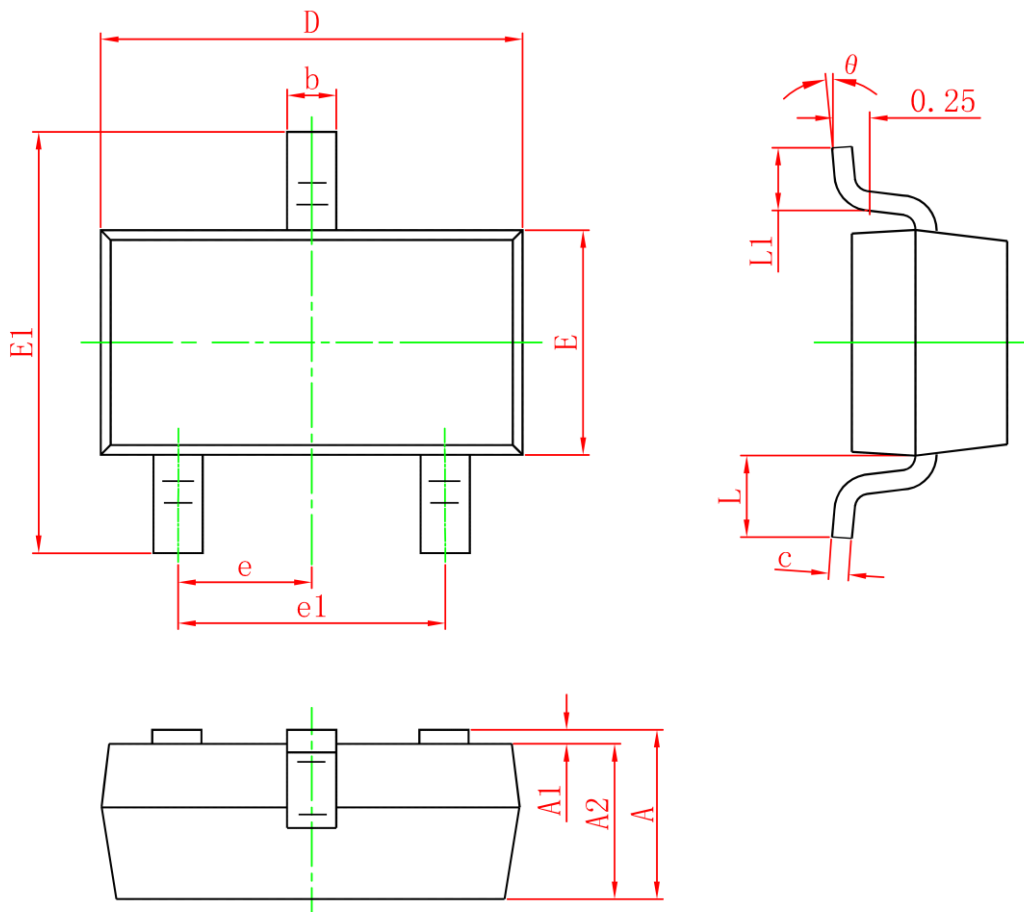SOT-23 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0	0.100	0	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.150	1.500	0.045	0.059
E1	2.250	2.650	0.089	0.104
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°