


Product Summary


The GESDBU15VY1R is designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multiplayer varistors (MLV) in consumer equipment applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

DFN1006-2L



Schematic diagram



Feature

- Low reverse stand-off voltage: 15V Max.
- Low reverse clamping voltage
- Low leakage current
- Fast response time
- IEC 61000-4-2 Level 4 ESD protection

Application

- Cellular Handsets and Accessories
- Serial ATA
- MDDI Ports
- USB Ports
- PCI Express and Serial SATA Ports

Marking: 15F

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

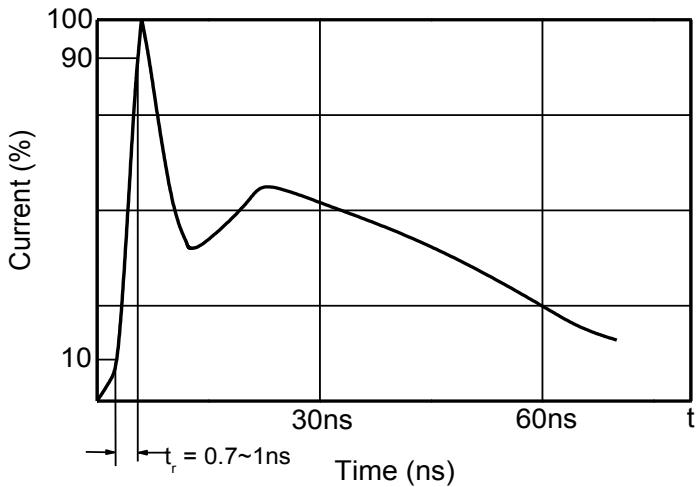
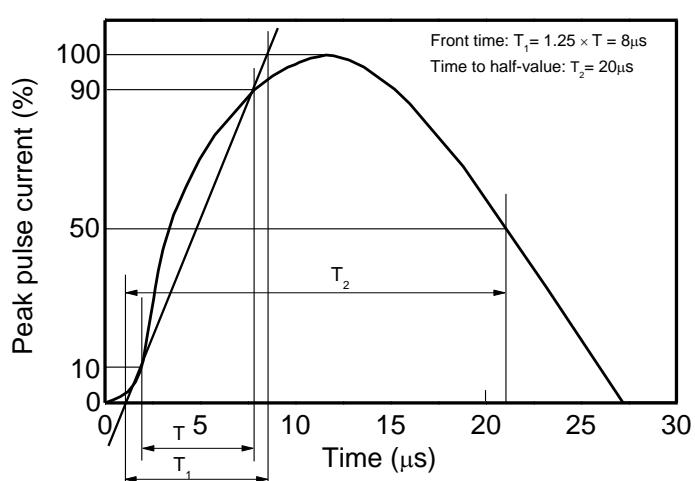
Parameter		Symbol	Value	Unit
IEC 61000-4-2 ESD Voltage	Air Model	V_{ESD}	± 15	kV
IEC 61000-4-2 ESD Voltage	Contact Model		± 8	
JESD22-A114-B ESD Voltage	Per Human Body Model		± 16	
ESD Voltage	Machine Model		± 0.4	
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)		P_{pk}	87.5	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)		I_{PP}	2.5	A
Lead Solder Temperature – Maximum (10 Second Duration)		T_L	260	$^\circ\text{C}$
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature		T_{stg}	-55~+150	$^\circ\text{C}$

ESD standards compliance
IEC61000-4-2 Standard

Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

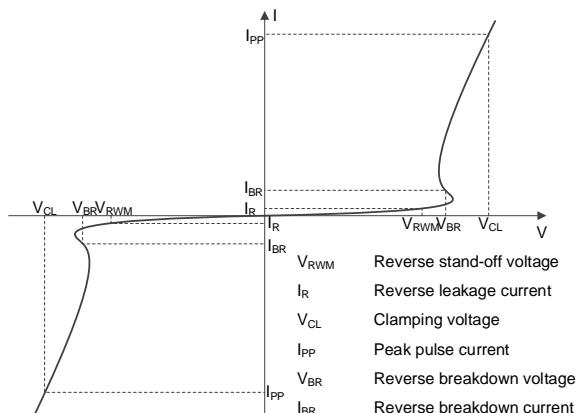
JESD22-A114-B Standard

ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

Contact discharge current waveform per IEC61000-4-2

8/20μs waveform per IEC61000-4-5


Electrical Parameter

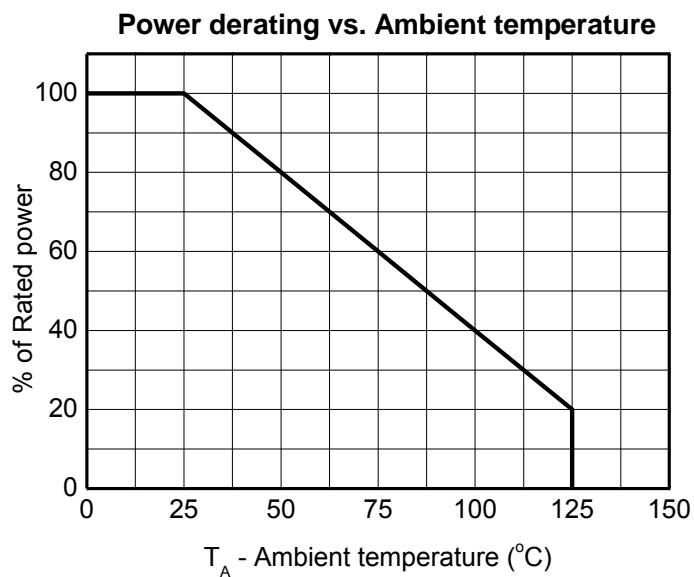
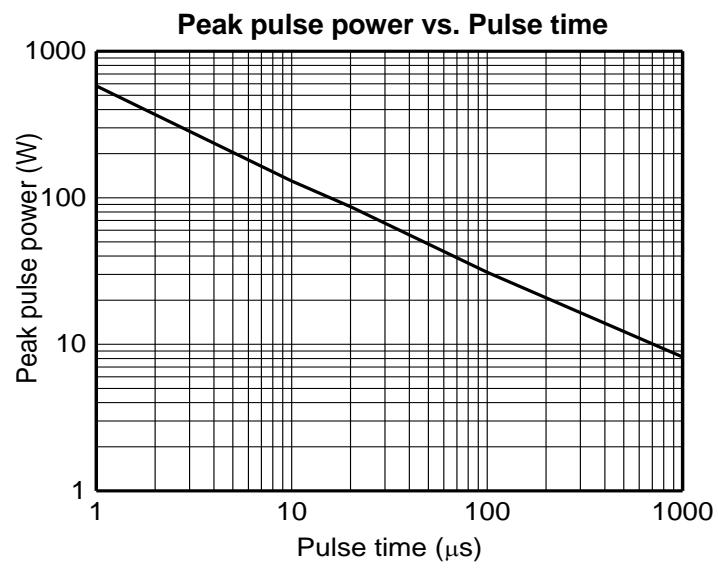
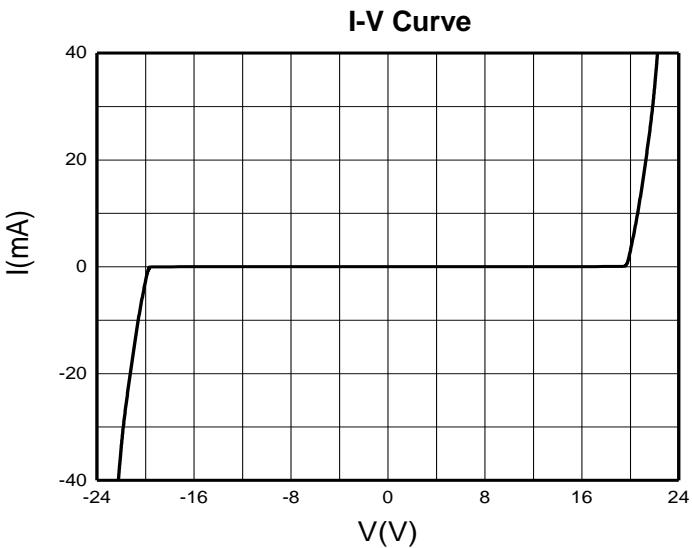
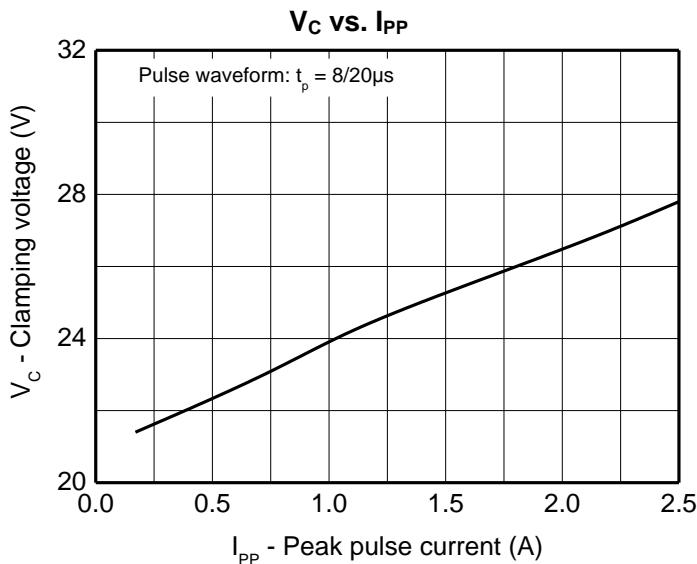
Symbol	Parameter
V _C	Clamping Voltage @ I _{PP}
I _{PP}	Peak Pulse Current
V _{BR}	Breakdown Voltage @ I _{BR}
I _{BR}	Test Current
I _R	Reverse Leakage Current @ V _{RWM}
V _{RWM}	Reverse Standoff Voltage

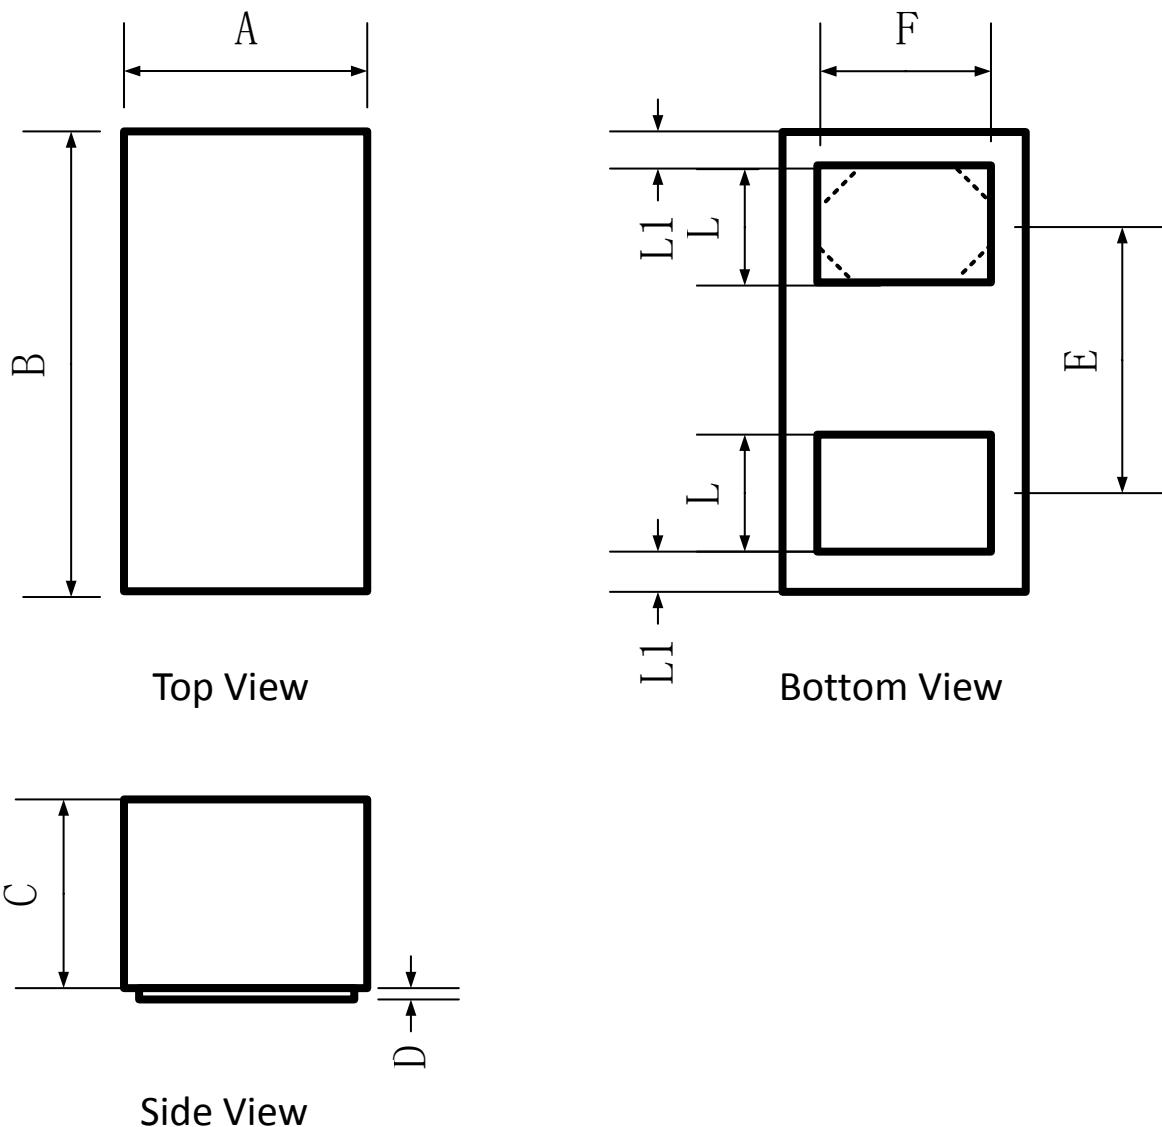


Electrical Characteristics($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse standoff voltage	V _{RWM} ¹⁾				15	V
Reverse leakage current	I _R	V _{RWM} =15V			1	µA
Breakdown voltage	V _{BR}	I _T =1mA	16.7	19.8	22	V
Clamping voltage	V _{C1} ²⁾	I _{PP} =1A			26	V
		I _{PP} =2.5A			35	V
Junction capacitance	C _J	V _R =0V,f=1MHz		0.3	0.5	pF

- 1) Other voltages available upon request.
- 2) Non-repetitive current pulse 8/20µs exponential decay waveform according to IEC61000-4-5

Typical Characteristics


DFN1006-2L Package Outline Dimensions


	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.55	0.60	0.68
B	0.95	1.00	1.08
C	0.44	0.47	0.50
D	0.00	0.03	0.05
E	-	0.65	-
F	0.40	0.50	0.60
L	0.20	0.25	0.30
L1	0.05REF		