



GP
ELECTRONICS

2N7002V

60V N-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	0.85Ω@10V	0.34A
	0.95Ω@4.5V	


Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge

Application

- Load Switch
- DC/DC Converter


MARKING:




ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	60	V
Gate - Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ^{1,5}	I_D	0.34	A
Pulsed Drain Current ²	I_{DM}	1.0	A
Power Dissipation ^{4,5}	P_D	0.25	W
Thermal Resistance from Junction to Ambient ⁵	$R_{\theta JA}$	500	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C

SOT-563



Schematic diagram









MOSFET ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 48\text{V}, V_{GS} = 0\text{V}$			1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$			± 95	nA
On Characteristics³						
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	1	1.5	2.5	V
Drain-source On-resistance	$R_{DS(\text{on})}$	$V_{GS} = 10\text{V}, I_D = 0.3\text{A}$		0.85	2.5	Ω
		$V_{GS} = 4.5\text{V}, I_D = 0.2\text{A}$		0.95	3	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 30\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		34.8		pF
Output Capacitance	C_{oss}			6.4		
Reverse Transfer Capacitance	C_{rss}			3.5		
Gate Resistance	R_g	$V_{DS} = 0\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		40		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = 30\text{V}, V_{GS} = 10\text{V}, I_D = 0.3\text{A}$		0.32		nC
Gate-source Charge	Q_{gs}			0.25		
Gate-drain Charge	Q_{gd}			0.17		
Turn-on Delay Time	$t_{d(\text{on})}$	$V_{DD} = 30\text{V}, V_{GS} = 10\text{V}, R_L = 100\Omega, R_G = 3\Omega$		3.8		ns
Turn-on Rise Time	t_r			2.9		
Turn-off Delay Time	$t_{d(\text{off})}$			14		
Turn-off Fall Time	t_f			8		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0\text{V}, I_s = 0.3\text{A}$			1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu\text{s}$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(\text{MAX})} = 150^\circ\text{C}$.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

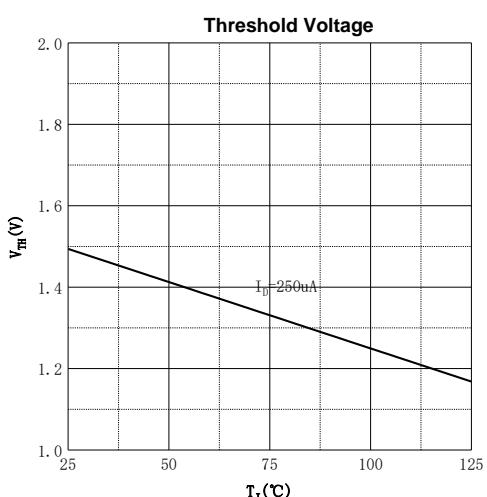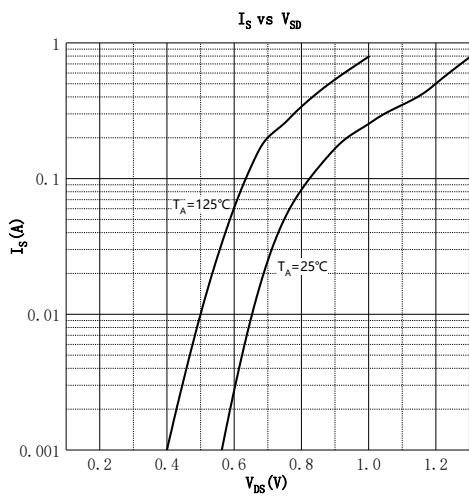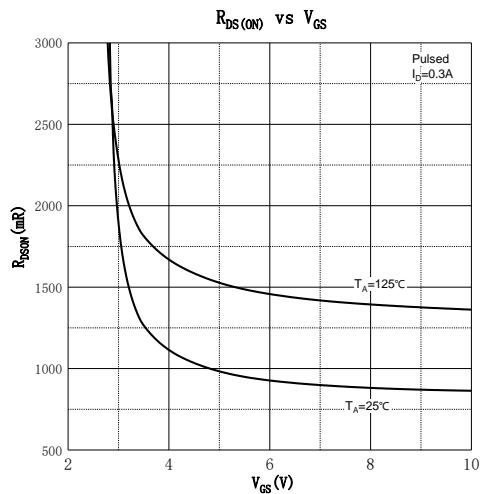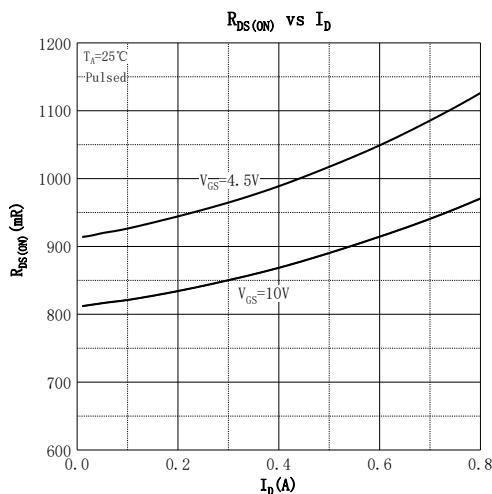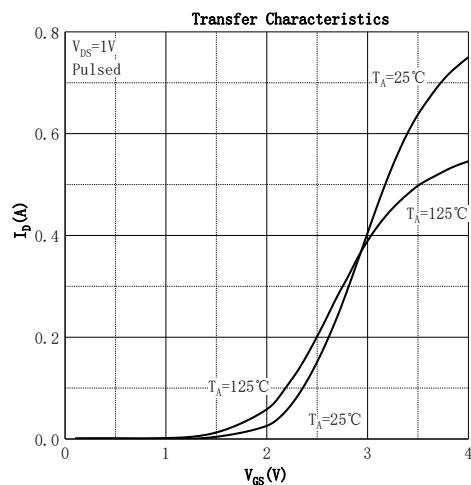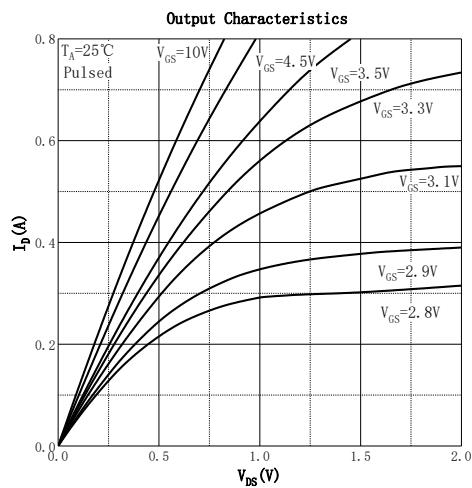

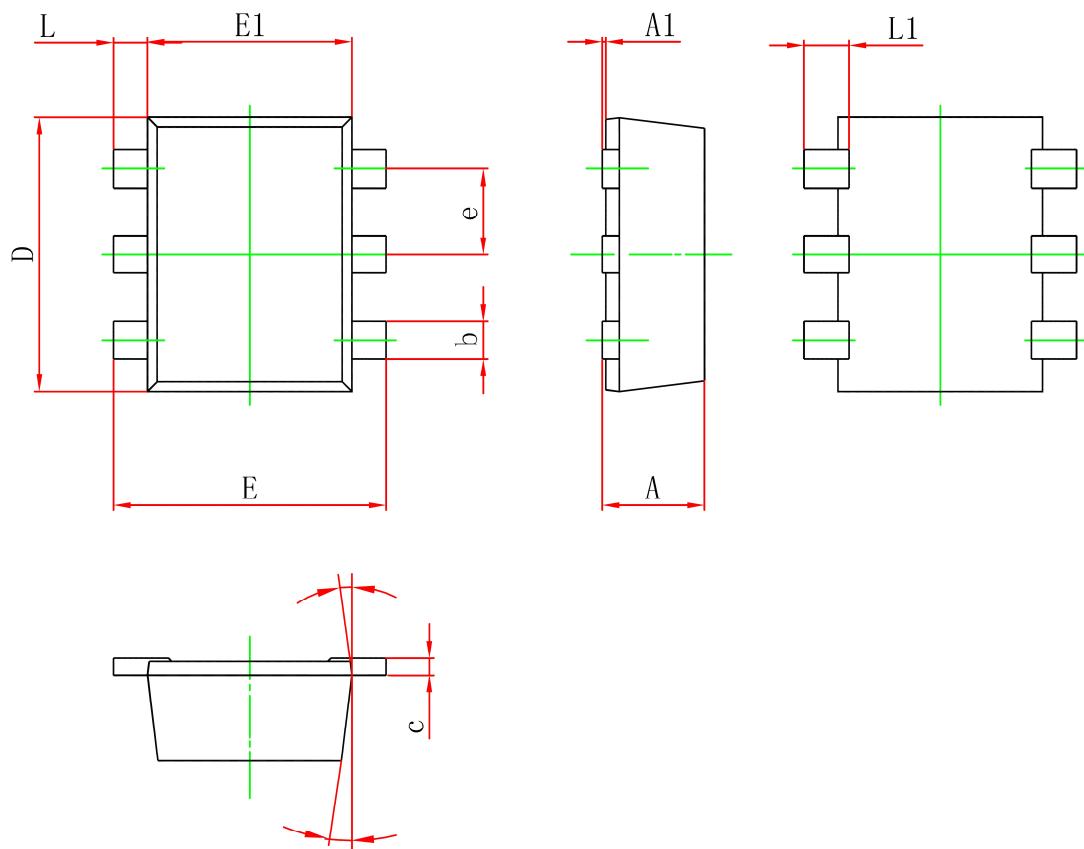SOT-563 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.500	0.600	0.020	0.024
A1	0.000	0.050	0.000	0.002
e	0.450	0.550	0.018	0.022
c	0.080	0.180	0.003	0.007
D	1.500	1.700	0.059	0.067
b	0.170	0.270	0.007	0.011
E1	1.100	1.300	0.043	0.051
E	1.500	1.700	0.059	0.067
L	0.100	0.300	0.004	0.012
L1	0.200	0.400	0.008	0.016
θ	7°		7°	